



PRODUCT SPECIFICATION

LCD Controller——**HD-40M**

V2.0

Shenzhen Huidu Technology Co., Ltd.

目录 Contents

01	Chapter I Product Description.....	3
	I . Overview.....	3
	II. Features.....	3
02	Chapter II Product specifications.....	4
	I . Basic Parameters.....	4
	1. Hardware Parameters.....	4
	2. Software Parameters.....	5
	II. Dimension Diagram.....	6
	III. Product Diagram.....	6
	IV. Interface parameter description.....	7
	1. PWR/DC (Power input) interface.....	7
	2. IR-LED (Remote control) interface and definition.....	7
	3. LVDS BL (LVDS backlight) Interface.....	8
	4. LVDS interface and definition.....	9
	5. USB interface and definition.....	10
	6. SPK (Power amplifier) interface.....	10
	7. UART (Serial Port)	11
	8. DEBUG Interface.....	11
03	Chapter III Communication Methods.....	12
	I . Wi-Fi Update Program.....	12
	II. U disk Update Program.....	12
	III. TF card Update Program	13
	IV. Internet Update	13
04	Chapter IV Appendix: Product Appearance.....	14

Chapter I Product Description

I. Overview


HD-40M is a well-built all-in-one motherboard, using Allwinner A40i Quad-core chip solution, equipped with Android 7.1.1 system, 1.2GHz, Mali-400MP2 GPU, with very strong video processing capabilities, compatible with most Video format and decoding capabilities. It supports IR control, Wi-Fi, RJ45 and other rich interfaces, making the product more versatile, and is widely used in advertising machines, interactive all-in-one machines, security, medical, transportation, finance, industrial control and other intelligent control fields, which can accelerate Product development cycle.

Due to its hardware platform and Android intelligent features, it can be used on the smart terminal motherboard when human-computer interaction or network device interaction is required, which can be your best choice

II. Features

- Minimalist design, reserved common interfaces, Mini size, can be used in ultra-thin application scenarios;
- High stability. The A40i Android integrated board adds its own unique technology to the hardware and software to ensure the stability of the product, which can make the final product reach 7*24 hours unattended.
- High integration. The A40i Android all-in-one board integrates Ethernet, Wi-Fi, Power amplifier, TF expansion card, USB expansion port, IR remote control function, HDMI, LVDS, Backlight control, microphone and other functions, which greatly simplifies the design of the whole machine.
- High scalability. 3*USB (1 *Pins, 2 *standard), 2*serial ports (1 *UART, 1 *DEBUG).
- High definition. It supports various LVDS/HDMI interface LCD displays, and supports various sizes and resolutions of cropped screens.
- Perfectly support multiple mainstream touch screen functions such as multi-point infrared touch, multi-point capacitive touch, multi-point Nano film touch, multi-point acoustic wave touch, multi-point optical touch, etc.

HD-40S

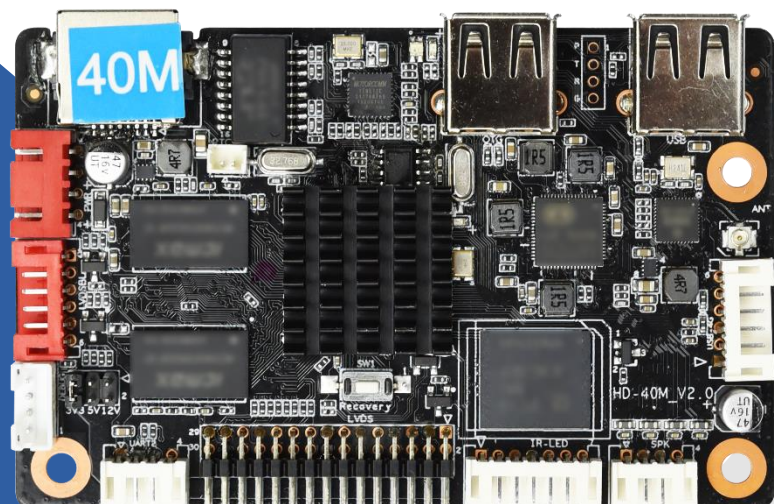

Chapter 2. Product Specifications

I . Basic Parameters

1. Hardware Parameters

Hardware Specifications


CPU	A40i, Quad-core, Dominant Frequency up to 1.2GHz, Android7.1.1
GPU	Mali400 MP2
Memory	1GB
Built-in storage capacity	eMMC Default 8GB
Network	RJ45 100M; Ethernet; Wi-Fi, support Wi-Fi 802.11b/g/n protocol;
Image rotation	Support 0 degree, 90 degree, 180 degree, 270 degree manual rotation
Display interface	1*LVDS interface (single/dual, 6-bit/8-bit), support 3.3V/5V/12V power supply Onboard backlight control supports 12V backlight power supply
Audio	Support standard left & right channel line output; support 3.5mm audio output interface
Power amplifier	2 outputs (8 ohms, 5 watts dual audio amplifier output)
Touch screen	Support USB multi-point infrared touch, multi-point capacitive touch, multi-point nano film touch, multi-point sound wave Touch, multi-point optical touch and so on
RTC	Built-in real-time clock function
USB	1 *USB-2.0 HOST , 1* USB2.0 OTG, 1 *Expansion USB
IR	Infrared receiver, support infrared remote control function
LED	1*power status LED(green),1*system LED(green blinking in default)
Button	1*upgrade key
Serial port	1 *UART, 1 *DEBUG
IO Port	5 *IO input/output, Available key scanning control
Power Adapter	Input:AC100-240V.50-60HZ , Output: DC12V 1.5A (Requires surge voltage less than 18V and ripple voltage less than 100mV)
Storage Humid	10% ~ 90%, RH
Storage Temp	-40°C~70°C
Work Temp	-20°C~70°C

2. Software Parameters


Software Specifications

Operating System	Android 7.1.1
Audio	MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP and other formats
Video	Support AVI, rm, rmvb, MKV, WMV, MOV, MP4, DAT, PMP, MPEG, MPG, FLV, ASF, TS, TP, 3GP, MPG and other formats
Image	Support JPG、BMP、PNG and various images formats
System default application software	APK Installer, Email, Calculator, Browser, Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Download, Camera, Music, Explorer, etc.
Language	Support multi-language
Input method	Standard Android keyboard with optional third-party input method
System Management	Original ecological Android system, open root permissions, and can customize product development
	Real-time remote monitoring, system crash self-recovery, unattended 7 * 24 hours
	Support OTA remote upgrade; support U disk upgrade
	Support boot animation definition
	Support server / stand-alone mode switching
System Watchdog	Support Wi-Fi hotspot
	Support software watchdog

II. Dimension Diagram

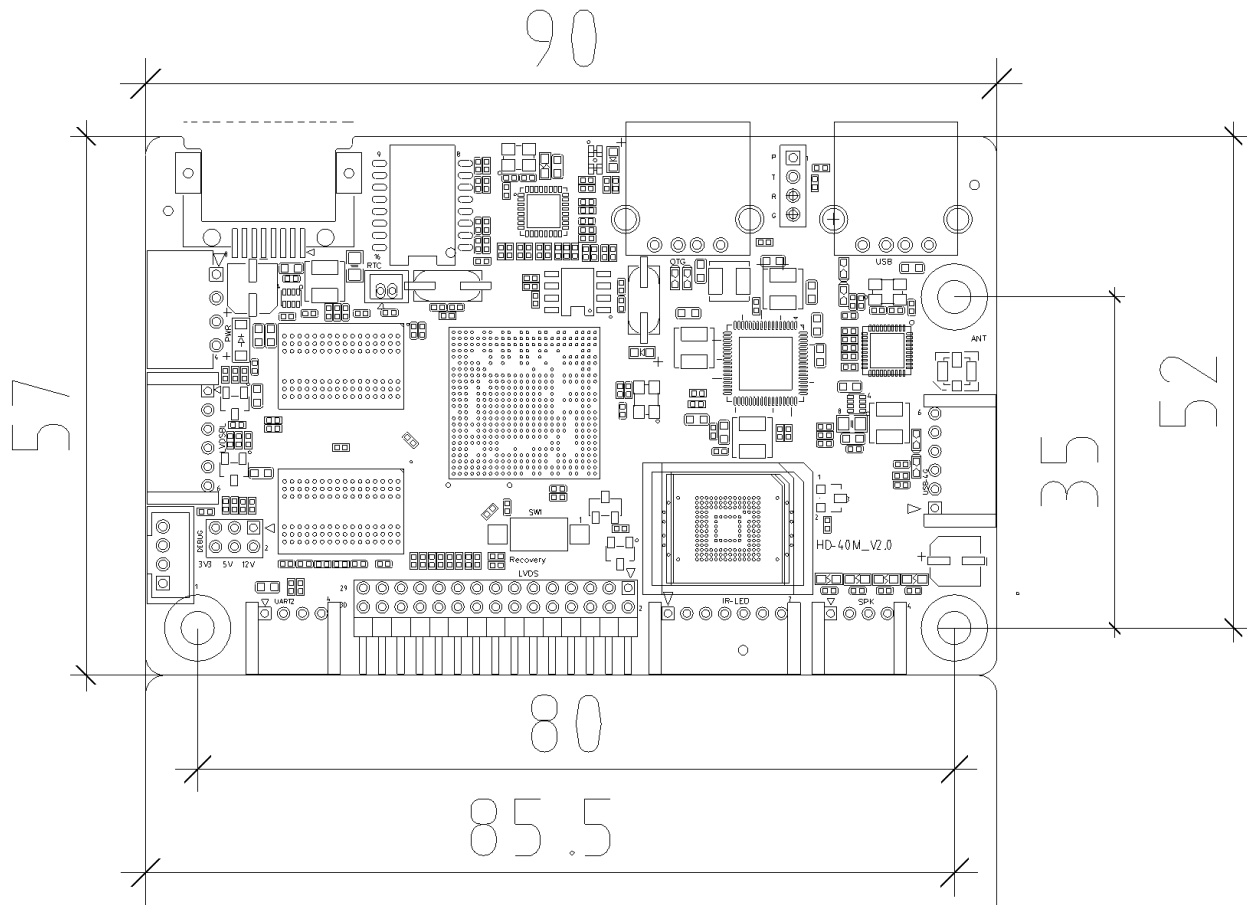

III. Product Diagram

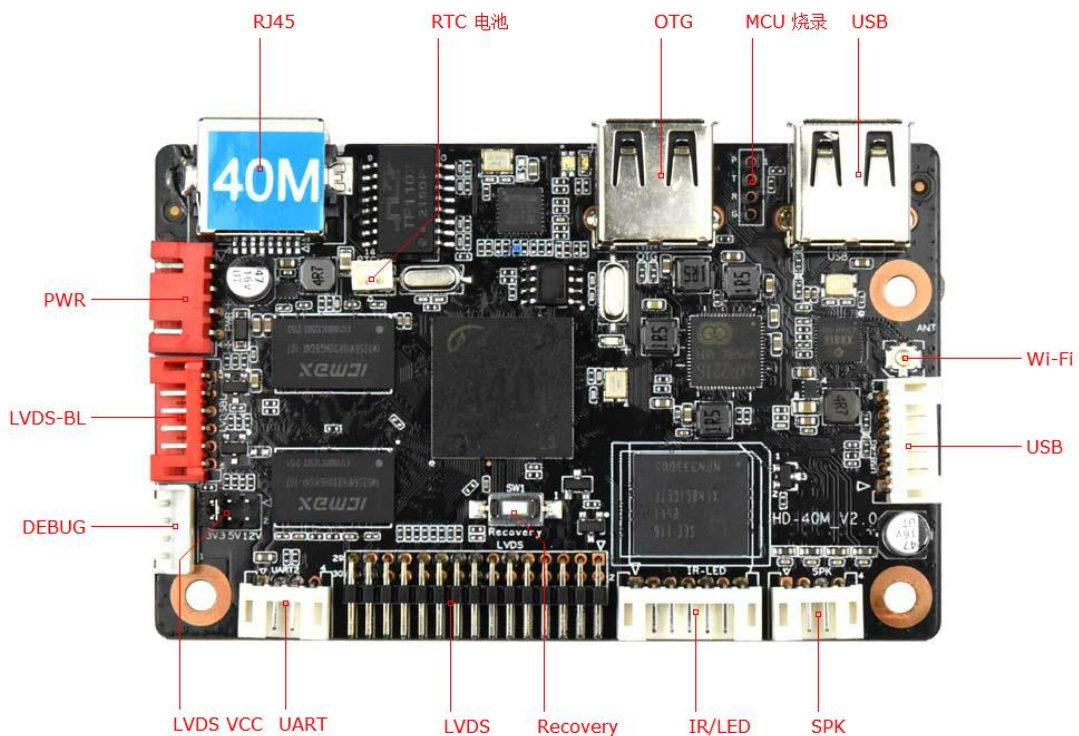

IV. Interface parameter description


1. PWR/DC (Power input) interface

It adopts 12V DC power supply and only allows the motherboard subsystem to be powered from the DC socket and power socket



Serial number	Definition	Attributes	Description
6	12V	input	12Vinput
5	12V	input	12Vinput
4	GND	GND	GND
3	GND	GND	GND
2	5VS	input	stand by 5V input
1	STB	output	stand by signal output


2. IR-LED (Remote control) interface and definition

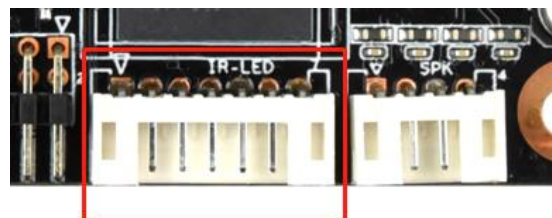

Serial number	Definition	Attributes	Description
1	RED	output	Red indicator lamp
2	5V	power	5V Output
3	GRN	output	Green indicator lamp
4	IO	output	Remote control signal Output

5	IR	input	Remote control signal input
6	GND	GND	GND
7	5V	power	5V Output

3、LVDS BL (LVDS backlight) Interface



Serial number	Definition	Attributes	Description
1	GND	GND	GND
2	GND	GND	GND
3	ADJ	output	Backlight Brightness control
4	EN	output	Backlight enable control
5	12V	power	12V Output
6	12V	power	12V Output

4、LVDS interface and definition




General LVDS interface definition, support single/dual, 6/8/10 bit 1080P LVDS screen. The screen voltage can be selected through the bridge-wire cap, and can choose to support 3.3V/5V/12V screen power supply.

In order to avoid burning the motherboards and screens, please pay attention to the following matters :

1. Please confirm whether the screen specification book screen supply voltage is correct, whether the board's corresponding power supply can meet the maximum working current of the screen.
2. Please use a multimeter to confirm that the power supply selected by the jumper cap is correct.
3. When connecting the 6 / 8-bit LVDS screen cable, install it near pin 1.

Serial number	Definition	Attributes	Description
1	VCC	power	3.3V/5V/12V optional output
2	VCC		
3	VCC		
4	GND	GND	GND
5	GND	GND	GND
6	GND	GND	GND
7	RX00-	output	Odd 0 -
8	RX00+	output	Odd 0+
9	RX01-	output	Odd 1 -
10	RX01+	output	Odd 1+
11	RX02-	output	Odd 2 -
12	RX02+	output	Odd 2+
13	GND	GND	GND
14	GND	GND	GND
15	RXOC-	output	Odd Clock-
16	RXOC+	output	Odd Clock+
17	RX03-	output	Odd 3 -
18	RX03+	output	Odd 3+
19	RXE0-	output	Even 0 -
20	RXE0+	output	Even 0+
21	RXE1-	output	Even 1 -
22	RXE1+	output	Even 1+
23	RXE2-	output	Even 2 -
24	RXE2+	output	Even 2+
25	GND	GND	GND
26	GND	GND	GND
27	RXEC-	output	Even Clock -
28	RXEC+	output	Even Clock+
29	RXE3 -	output	Even 3 -
30	RXE3+	output	Even 3+


5. USB interface and definition

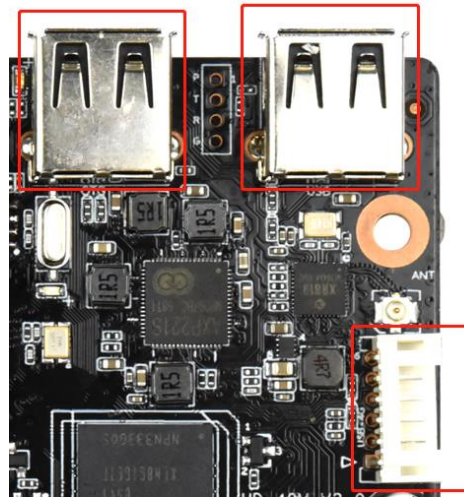

The motherboard has 2 USB standard interfaces and 1 USB pin


Serial number	Definition	Attributes	Description
1	5V	power	5V output
2	DM	Input/Output	DM
3	DP	Input/Output	DP
4	GND	GND	GND

6. SPK (Power amplifier) interface

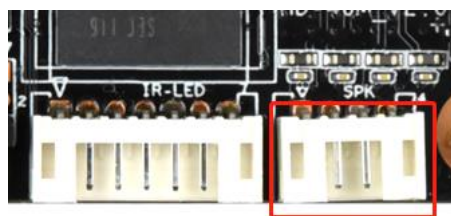

Serial number	Definition	Attributes	Description
1	OUTP-R	Output	Right channel +
2	OUTP-R	Output	Right channel -
3	OUTP-L	Output	Left channel -
4	OUTP-L	Output	Left channel +

7. UART (Serial Port)




The motherboard leads to one set of common UART serial ports, which can support common UART serial devices on the market.

Matters need attention:

1. Whether the TTL serial port voltage matches. Can not directly connect to MAX232,485 devices.
2. Whether the TX and RX connections are correct.

Serial number	Definition	Attributes	Description
1	5V	power	5V output
2	TX	Output	TX
3	RX	input	RX
4	GND	GND	GND


8. DEBUG Interface




Serial number	Definition	Attributes	Description
1	3V3	power	3.3V output
2	TX	Output	TX
3	RX	input	RX
4	GND	GND	GND

Chapter III Communication Methods


I. Wi-Fi Update Program

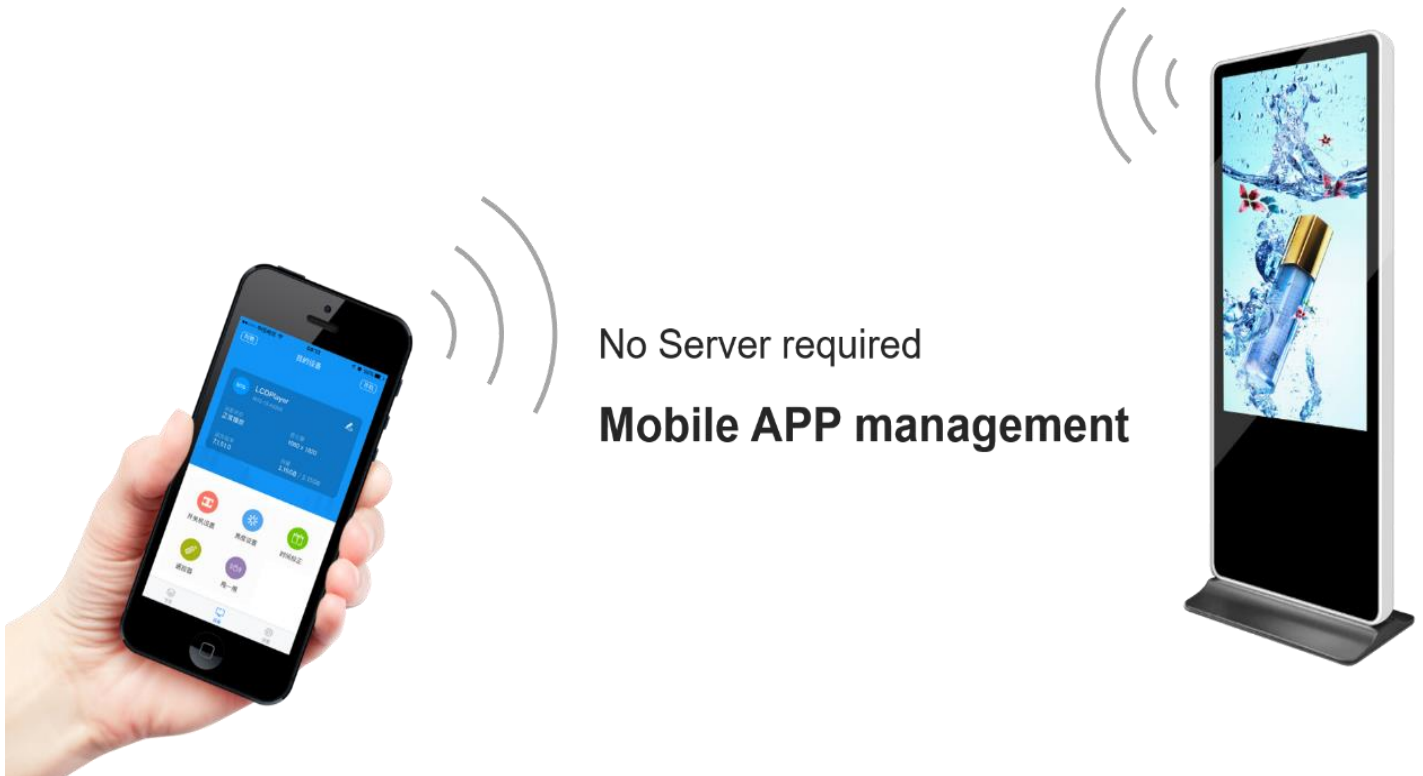


II. U disk Update Program

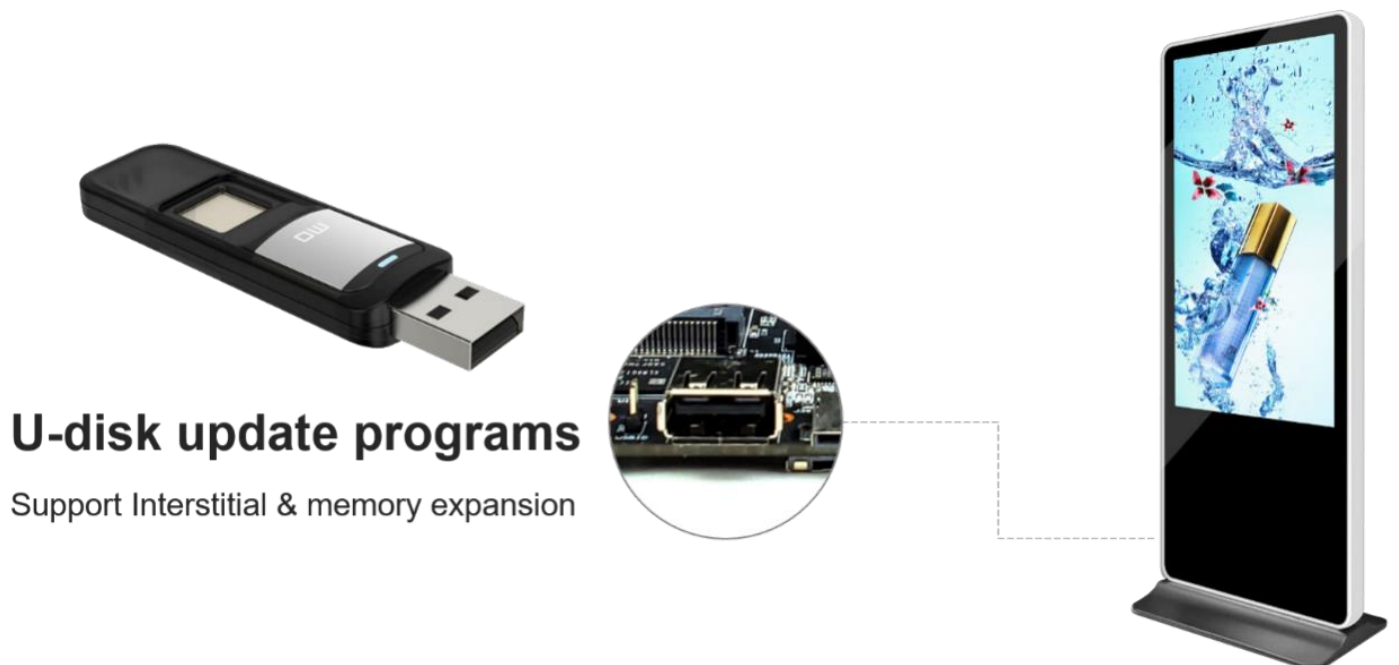


III. TF card Update Program

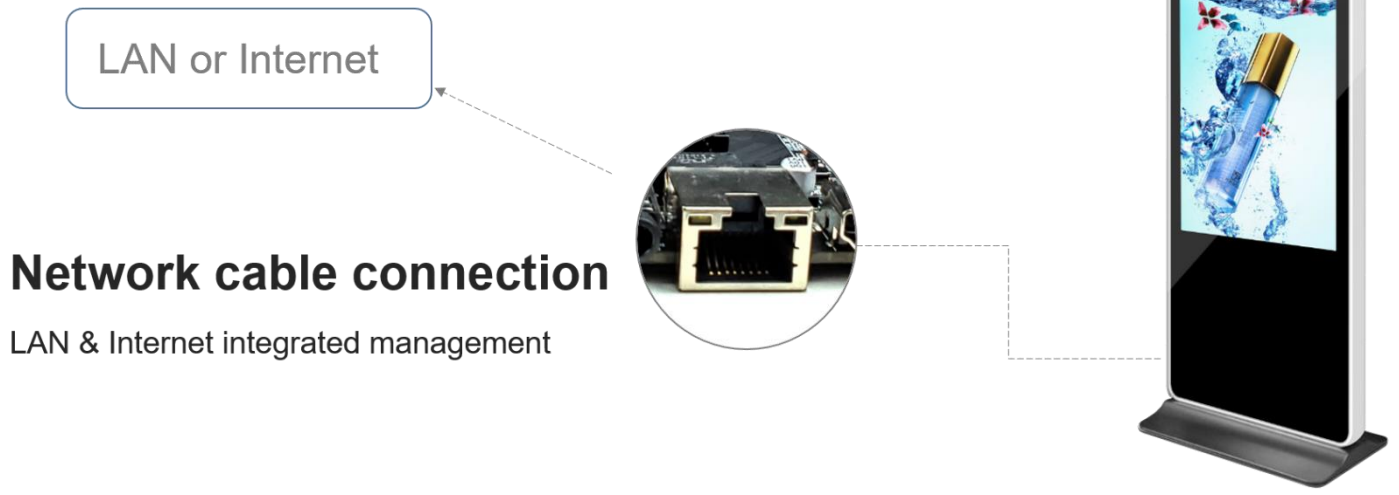

IV. Internet Update

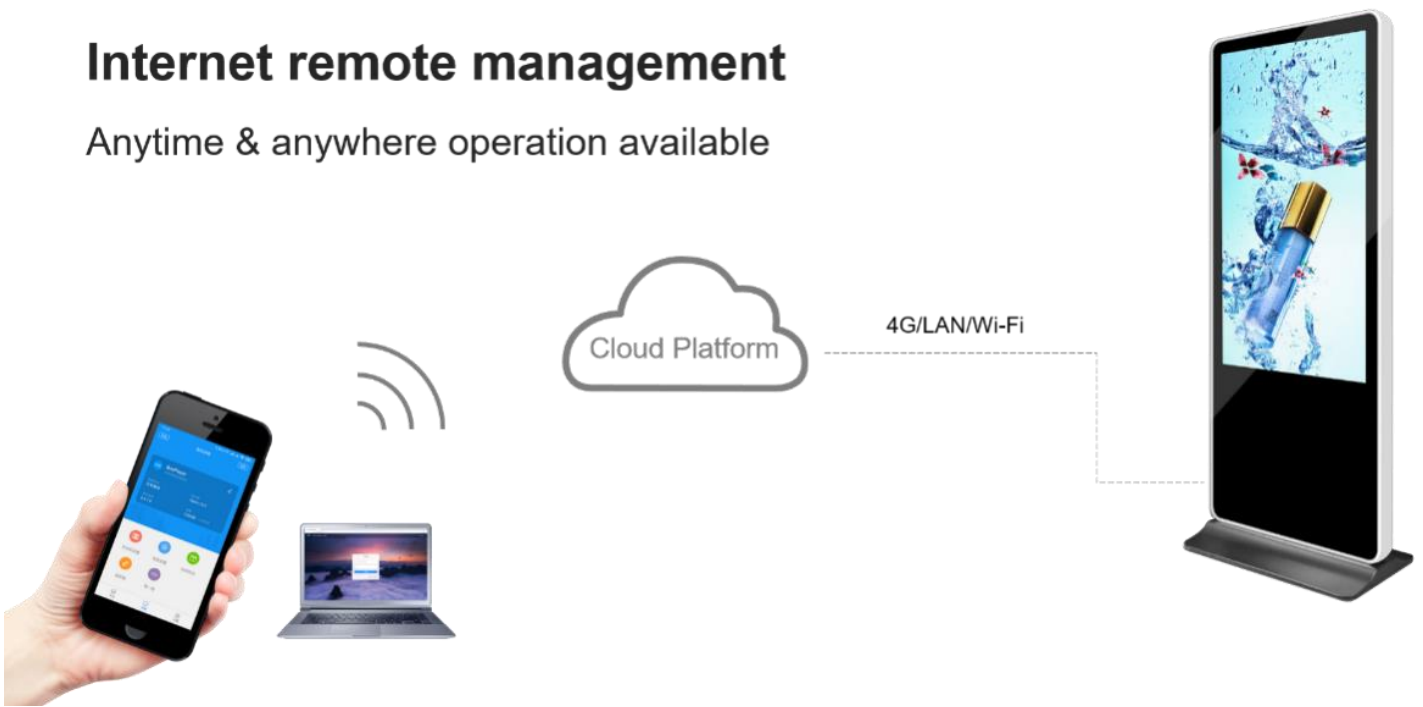

Chapter IV Appendix: Product Appearance

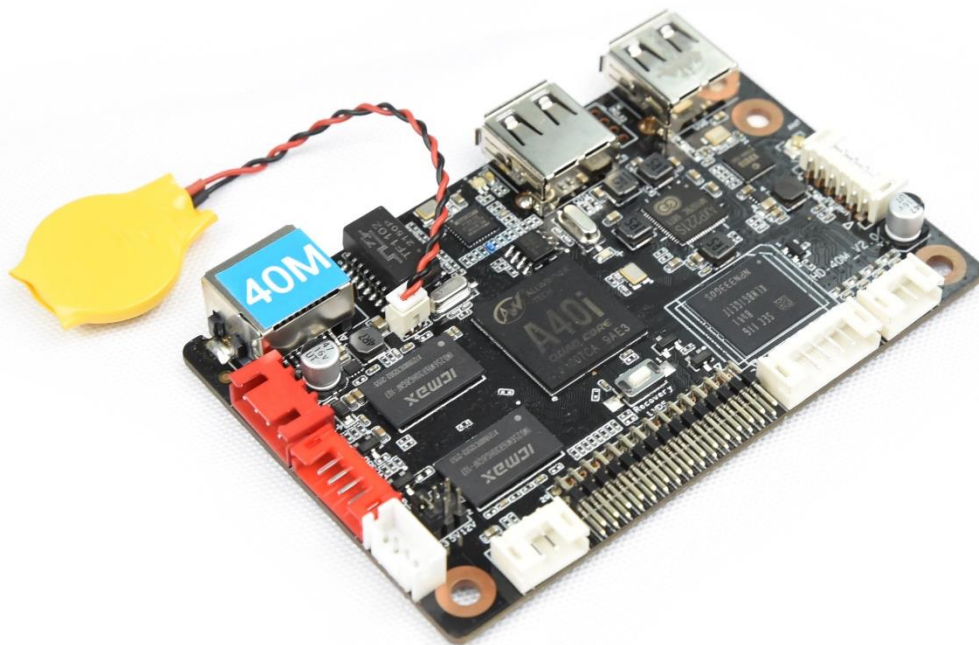

Note:

1. Paste the corresponding model label on the sales product. Some difference between the product picture in the specification and the actual product, not a fake or inferior product. If you have any questions, please contact HUIDU Technology for confirmation.
2. **Do not operate with power on, Do not hot swap.**