

Product Specifications

Single Color Wi-Fi Control Card

HD-W0

V1.0

1. Overview

W0 is a low cost, high cost-effective single color Wi-Fi controller, easy to operate, better display information, supports variety kinds of single-color display. For the door lintel screen, store screen and other places information display.

Application software: HD2020 and LedArt (APP)

2. Connection Demo

The mobile phone and laptop can be connected to the Wi-Fi hotspot of the control card to update the program.




3. Product Features

1. Wi-Fi on board, Eliminate installation trouble
2. Support program border, regional border settings, custom borders
3. A variety of action display
4. Support for simple animations word
5. More than 20 kinds of text effects display
6. Support connect brightness sensor


4. Functions List

Function	Parameters
Control range	Single color: 320*32, 640*16
FLASH Capacity	1M Byte
communication	Wi-Fi
Program Quantity	Max 1000pcs, Can play by time section or control by buttons
Area Quantity	20areas with separate zone, and separated special effects and border
Display Showing	Text, timing, temperate, humidity, Count, Lunar calendar
Display	Sequence display
Clock Function	1、 Support Digital Clock, Dial Clock, Lunar Time 2、 The Font, size, color and position can be set freely 3、 support multiple time zones
Extended Equipment	Brightness sensor
Automatic Switch screen	Support timer switch machine
Dimming	Support three brightness adjustment mode
Power	3W

5. Dimension Chart

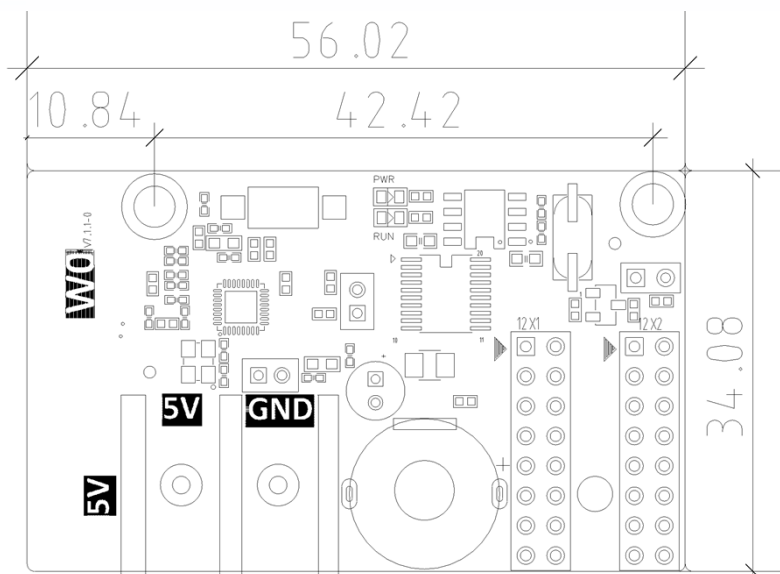

6. Interface Description

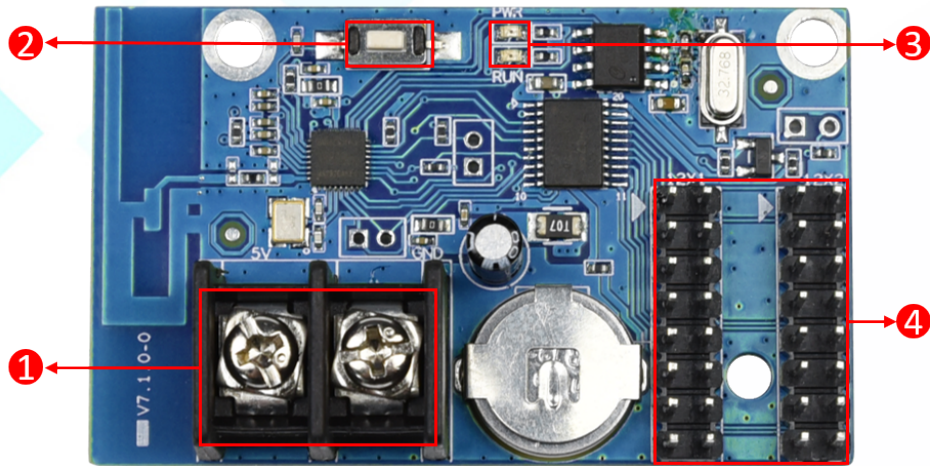

- ① Power connector, Connect 5V power supply,
- ② Test button, Click to switch screen test status,
- ③ Indicator light, The card works fine, the PWR indicator light is always on, and RUN indicator light is flashes,
- ④ HUB12 port, Connect the LED modules.

7. HUB12 port Definition

1	OE	A	2
3	GND	B	4
5	GND	C	6
7	GND	CLK	8
9	GND	LA	10
11	GND	R	12
13	GND	G	14
15	GND	D	16

HUB12

8. Basic Parameters

Parameter item	Parameter value
Rated voltage (V)	DC 4.2V-5.5V
Work environment temperature (°C)	-40°C-80°C
Work environment humidity (RH)	0%RH-95%RH
Storage humidity (RH)	

Precautions

- To ensure that the control card is stored during normal operation, make sure the battery on the control card is not loose.
- In order to ensure the long-term stable operation of the system, please try to use the standard 5V power supply voltage.
- There may be slight differences between the product pictures in the specification and the physical appearance. If you have any questions, please contact the technical support or salesperson for confirmation.