

# Product Specification


All-in-one LED Controller HD-VP410H

V1.0



### 1. System Overview

HD-VP410H is a three-in-one video processor that integrates traditional video processor, 4-way Gigabit network port output, and U disk playback functions. It not only simplifies the construction of the on-site environment, but also improves the reliability of the product. It supports 5 channels of synchronous signal input and 1 channel of USB input, and can be used in hotels, shopping malls, conference rooms, exhibitions, studios and other occasions that require synchronous playback; in addition, the device also supports point-to-point input/output to allow the LED display to display A clearer picture.

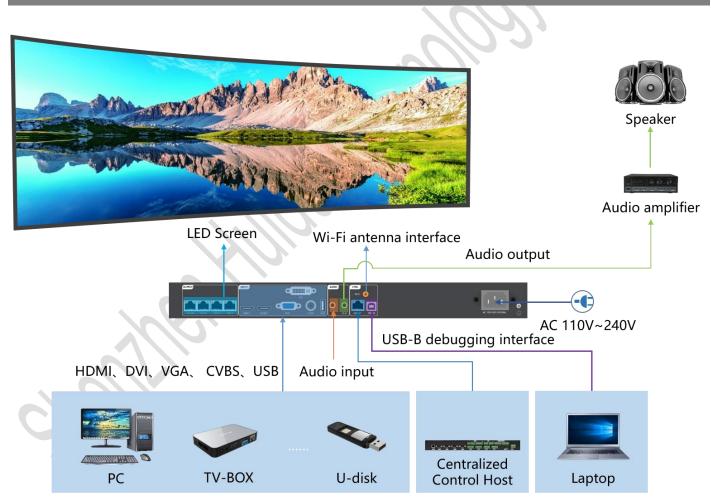

## 2. Connection Diagram



## 3. Product Characteristics

#### Input

- Supports 2 channels of HDMI, 1 channel of DVI, 1 channel of VGA, and 1 channel of CVBS signal input, which can be switched at will;
- 1 USB input supports direct playback of videos and pictures in various mainstream formats in the root directory of the USB flash drive, and supports up to 1080P high-definition video playback;
- Supports 1 channel TRS 3.5mm standard two-channel audio input and HDMI audio input.

#### Output

- Standard configuration is 4-way Gigabit network ports, which can be directly cascaded to the receiving card;
- The maximum control is 2.6 million pixels, with a maximum horizontal support of 3840 pixels and a maximum vertical support of 2500 pixels;
- 1 channel TRS 3.5mm standard two-channel audio output.


#### Features

- Support limited transfer to complete;
- Video signals can be switched, cropped, and zoomed arbitrarily;
- Supports 16 scene presets and calls;
- Support brightness and color temperature adjustment;
- Supports docking with central control equipment;
- Standard Wi-Fi, supports wireless control via mobile APP;
- Support infrared remote control (optional);
- Support 4G module (optional);
- Supports SDI signal loop output (optional).



## 4. Appearance Description

#### Standard front panel:

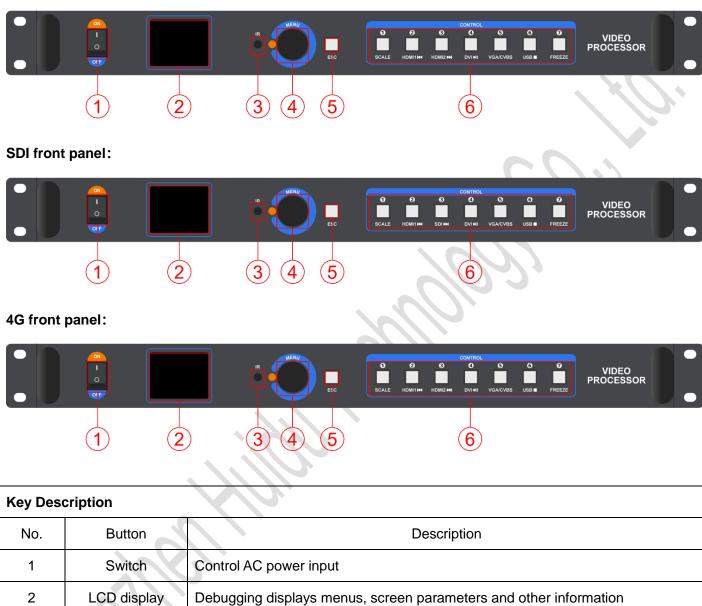


2	LCD display	Debugging displays menus, screen parameters and other information		
3	IR	Receive infrared remote control		
		Press the knob to enter submenu or confirm selection		
4	MENU	Rotate the knob to select menu items or adjust parameters		
5	ESC	Escape key/return key		
_	SCALE	Partial/full screen switch button		
6	HDMI1	Select HDMI signal to play/play the previous U disk program		




HDMI2	Select HDMI signal to play/play the next U disk program
DVI	Select DVI signal playback/U disk program playback and pause
VGA/CVBS	Select VGA/CVBS signal playback
USB	Select to play U disk program/stop playing U disk program
FREEZE	Freeze with one click


#### Standard rear panel:

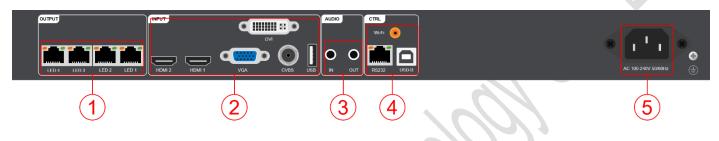

#### SDI rear panel:

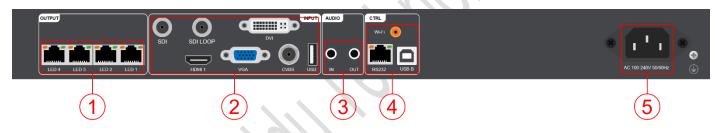

#### 4 G type rear panel:

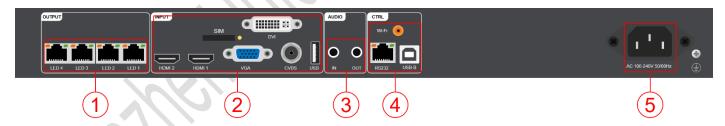

Inpu	Input interface			
No.	Interface name	Quantity	Description	
	) )		USB2.0 input interface	
			U disk can be inserted to play videos and pictures	
2	USB	1	Video file formats: mp4, avi, mpg, mkv, mov, vob and rmvb;	
			Video encoding: MPEG4 (MP4), MPEG_SD/HD, H.264 (AVI, MKV), FLV;	
			Image file formats: jpg, jpeg, png and bmp	




			Video resolution: maximum support 1920×1080@30Hz
	HDMI	2	HDMI input interface
			Interface form: HDMI-A
			Signal standard: HDMI1.4 backward compatible
			Resolution: VESA standard, ≤1920×1080p@60Hz
			Support audio input
		1	CVBS input interface
			Interface form: BNC
	CVBS		Signal standard: PAL/NTSC 1Vpp±3db (0.7V Video+0.3v Sync) 75 ohm
			Resolution: 480i, 576i
			DVI input interface
		1	Interface form: DVI-I socket
	DVI		Signal standard: DVI1.0 backward compatible
			Resolution: VESA standard, 1080p
		1	VGA input interface
			Interface form: DB15 socket
			Signal standard: R, G, B, Hsync, Vsync:0 to1Vpp±3dB (0.7V Video+0.3v
	VGA		Sync)
			75 ohm black level: 300mV Sync-tip: 0V
			Resolution: VESA standard, ≤1920×1080p@60Hz
	SDI	1	SDI input interface (optional)
			Interface form: BNC
			Signal standard: SD-SDI, HD-SDI, 3G-SDI
			Resolution: VESA standard, ≤1920×1080@60Hz
3	AUDIO IN	1	TRS 3.5mm two-channel audio input interface
5	Power supply	1	AC 100~240V 50/60Hz
Ũ	i ener eappij	•	



Output interface			
No.	Interface name	Quantity	Description
1	Gigabit network port	4	Used to cascade receiving cards to transmit RGB data streams; each
			network port controls a range of 650,000 pixels.
			Support docking multi-function card
3	AUDIO OUT	1	TRS 3.5mm two-channel audio output interface
			Connect to audio power amplifier for high-power audio external amplifier

Control interface			
No. Interface name Quantity		Quantity	Description
	USB-B	1	Connect to computer for debugging equipment
4	Wi-Fi	1	Connect Wi-Fi antenna to enhance Wi-Fi signal
	RJ45	1	RJ45 interface, connected to central control equipment

\* The schematic diagram of the RJ45 to DB9 connection cable is as follows. It is optional. If you need it, please contact Grayscale sales or technical support in advance.

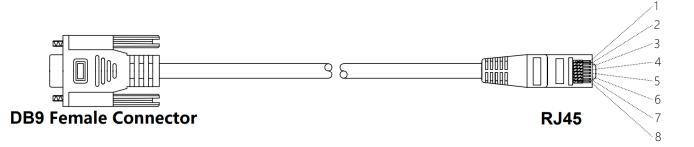

Line Ordering:



#### DB9 female connector RJ45 connector 2-RX TX-1(Red) 3-TX RX-2(Blue) 5-GND GND-3(Black)

 $\cap$ 

8

7

5

3


2



## \* The schematic diagram of the remote control is as follows. It is optional. If you need it, please contact Grayscale sales or technical support in advance.



## 5. Product Size

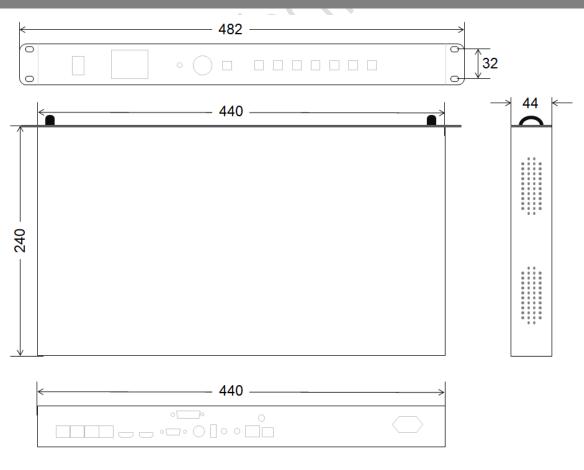



## 6. Basic Parameters

	Parameter item	Parameter value
Ch	assis specifications	1U standard
Electrical	Power supply	AC 100~240V 50/60Hz
Specifications	Power consumption	14W
Working	Working temperature ( $^\circ C$ )	-20℃~55℃
environment	Working humidity (RH)	20%RH~90%RH (no condensation)
Storage	Storage temperature ( $^{\circ}C$ )	-20℃~60℃
environment Storage humidity (RH)		10%RH~95%RH (no condensation)
Equipment Size		W×H×D/482mm×44mm×240mm
Specifications	Net weight	2.6KG
Packing Packing size		W×H×D/515mm×82mm×355mm
specifications	Packing weight	2.7KG

#### illustrate:

1. Welcome to choose Huidu Technology products. There may be slight differences between the product pictures in the specifications and the actual appearance (including the number of holes in the product size diagram, etc.). If you have any questions, please contact technical support or salesperson for confirmation.

