


CVT310

Fiber Converter

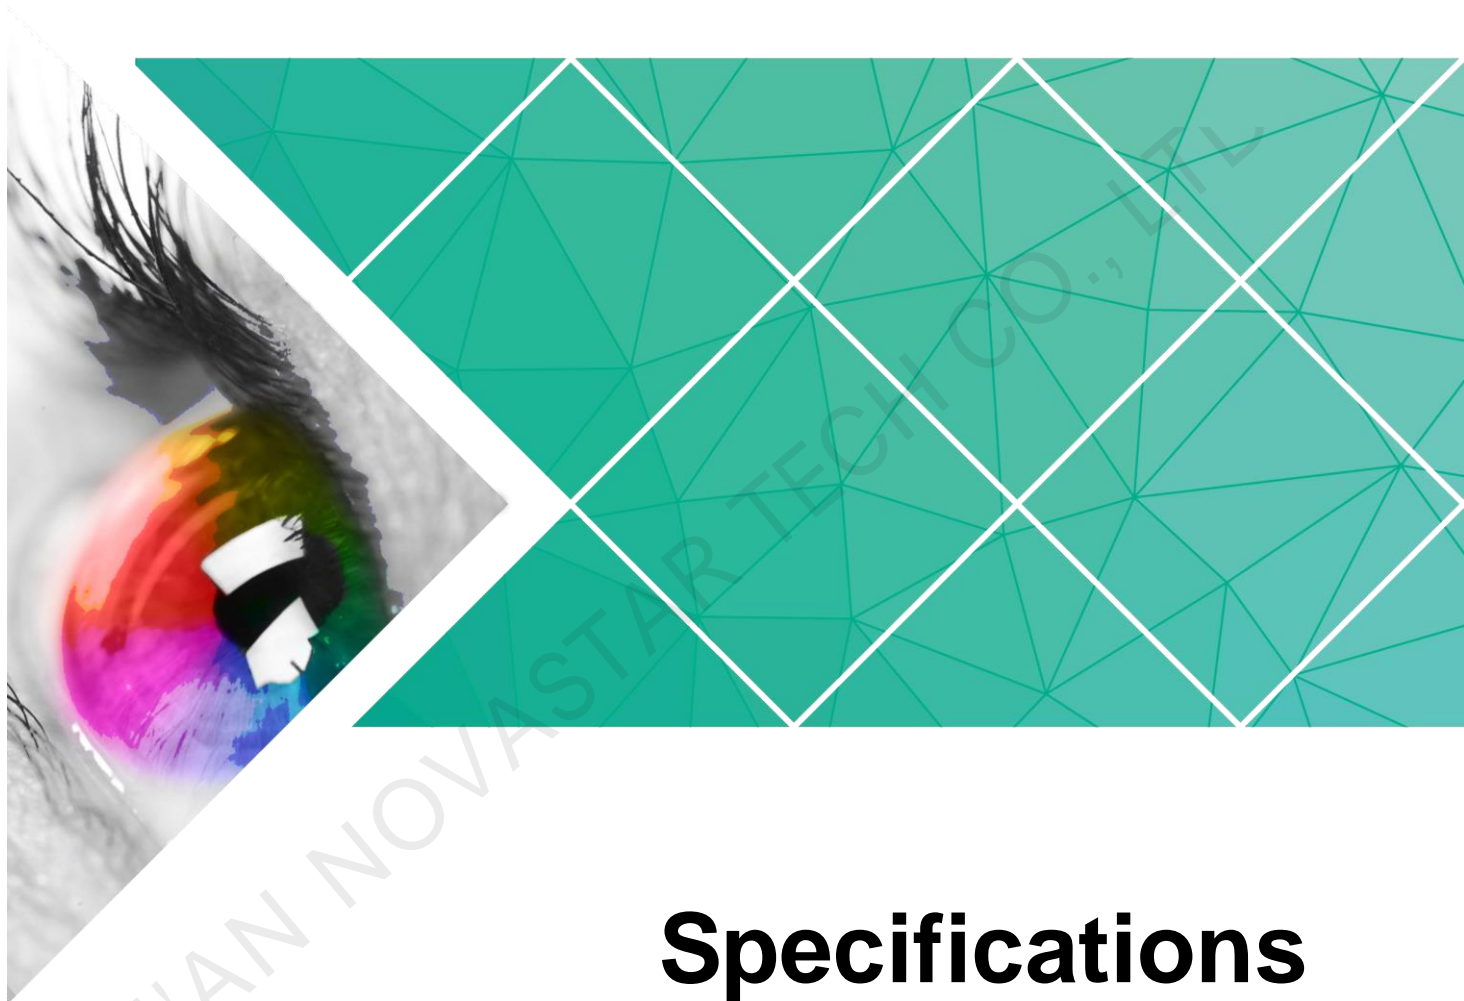

Specifications

Document Version: V2.3.0

Document Number: NS110100439

Copyright © 2018 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

You are welcome to use the product of Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar). This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. Any problem in use or any good suggestion, please contact us through ways provided in the document. We will do our utmost to solve the problems and adopt the suggestions after evaluation as soon as possible.

XI'AN NOVASTAR TECH CO., LTD.

Change History

Version	Release Date	Description
V2.3.0	2018-03-15	<ul style="list-style-type: none">• Added optical module features.• Added certification information.• Added packaging information.

XI'AN NOVASTAR TECH CO., LTD

Contents

Change History	ii
1 Safety	1
1.1 Storage and Transport Safety	1
1.2 Installation and Use Safety	1
2 Overview	2
3 Features	3
4 Appearance	4
5 Dimensions	6
6 Specifications	7

1 Safety

This chapter illustrates safety of the fiber converter CVT310 to ensure the product's storage, transport, installation and use safety.

Safety instructions are applicable to all personnel who contact or use the product. First of all, pay attention to following points.

- Read through the instructions.
- Retain all instructions.
- Comply with all instructions.

1.1 Storage and Transport Safety

- Pay attention to dust and water prevention.
- Avoid long-term direct sunlight.
- Do not place the product at a position near fire and heat.
- Do not place the product in an area containing explosive materials.
- Do not place the product in a strong electromagnetic environment.
- Place the product at a stable position to prevent damage or personal injury caused by dropping.
- Save the packing box and materials which will come in handy if you ever have to store and ship the product. For maximum protection during storage and shipping, repack the product as it was originally packed at the factory.

1.2 Installation and Use Safety

- Only trained professionals may install the product.
- Plugging and unplugging operations are prohibited when the power is on.
- Ensure safe grounding of the product.
- Beware of electric shock hazards.
- Always wear a wrist band and insulating gloves.
- Do not place the product in an area having frequent or strong shake.
- Perform dust removing regularly.
- Contact NovaStar for maintenance at any time, rather than have the product disassembled and maintained by non-professionals without authorization.
- Replace faulty parts only with the spare parts supplied by NovaStar.

2 Overview

The CVT310 is a fiber converter developed by NovaStar. It is used for conversion between optical signals and electrical signals.

The CVT310 features 1 Ethernet port, and 1 multiple-mode twin-core LC fiber connector.

The CVT310 is ready to use once it is connected, with no drivers required.

3 Features

- Features 1 × Ethernet port, 1 × fiber connector.
- Features AC 100–240 V 50/60 Hz power supply.
- Supports multiple-mode twin-core LC fiber connector, with a transmission distance of 300 m.

4 Appearance





No.	Name	Description
①	Optical module	<p>Multiple-mode twin-core LC fiber connector, with optical module installed at the factory.</p> <p>Features of optical module:</p> <ul style="list-style-type: none"> • Transmission rate: 1.25 Gb/s • Hot plugging • Wave length: 850 nm • Transmission distance: 300 m
②	Ethernet	Gigabit Ethernet port
③	Indicators	<ul style="list-style-type: none"> • POWER: Power indicator • FX/ACT: Optical fiber indicator. When two CVT310 are cascaded, the FX/ACT indicators on both sets are on to denote the optical fiber communications between them are good; Both or one of the indicators are off to denote the optical fiber communications between them are abnormal. • TP/ACT: The TP/ACT indicator is always on to indicate the Ethernet communications from the sending card to the CVT310 or from the CVT310 to the receiving card is normal. Otherwise the indicator is off. • DATA: The DATA indicator near the receiving card flashes quickly only when both FX/ACT and TP/ACT indicators

		are always on. Otherwise the DATA indicator is off.
④	Switch	ON/OFF
⑤	AC power input	AC 100–240 V 50/60Hz

XI'AN NOVASTAR TECH CO., LTD

5 Dimensions

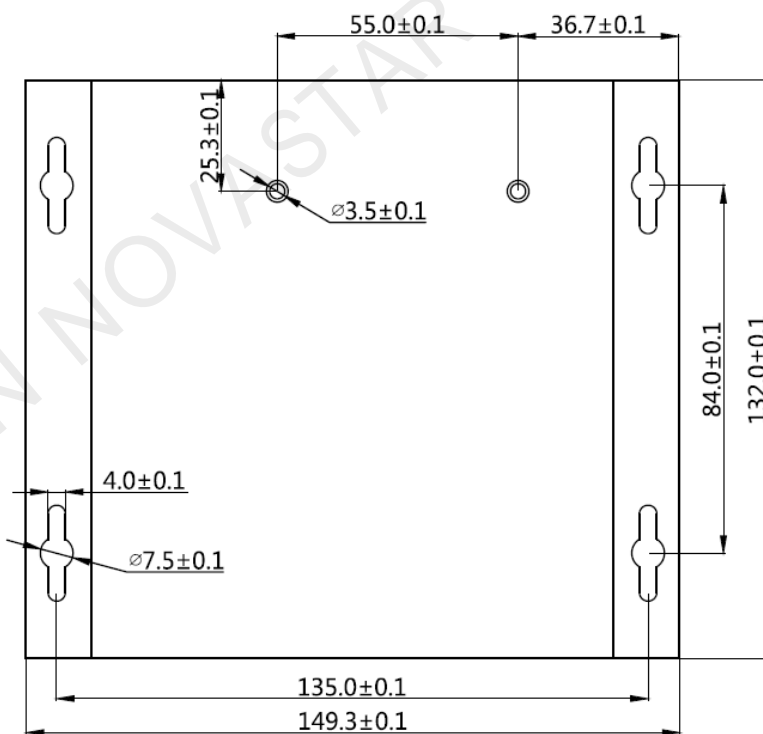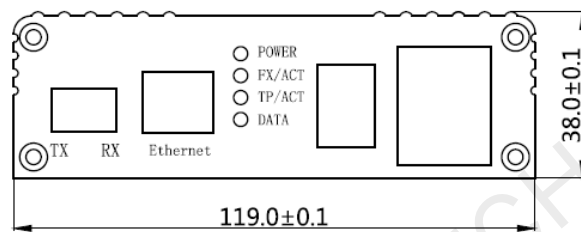

Unit: mm

6 Specifications

Input Voltage	AC 100–240 V 50/60Hz
Rated Current	0.7 A
Rated Power Consumption	3.5 W
Operating Temperature	-20°C–70°C
Storage Temperature	-30°C–80°C
Operating Humidity	10% RH–90% RH
Dimensions	149.3 mm × 132.0 mm × 38.0 mm
Weight	0.53 kg
Certifications	<ul style="list-style-type: none">• CE• RoHS• FCC• IC• EAC
Packing	Suitcase: 335 mm × 190 mm × 62 mm, Kraft cardboard box printed with NOVASTAR . Foam: (Top) 330 mm × 180 mm × 5 mm, (Bottom) 330 mm × 180 mm × 53 mm Carton: 400 mm × 365 mm × 355 mm, Kraft cardboard box printed with NOVASTAR .