



Synchronous send card ST40

Specification

Version: Ver.1.0

Statement

Dear user friend, thanks for choosing SHENZHEN SYSOLUTION TECHNOLOGY CO.,LTD referred to as Xixun Technology) as your LED advertising equipment control system. The main purpose of this document is to help you quickly understand and use the product. We strive to be precise and reliable when writing the document, and the content may be modified or changed at any time without notice.

Copyright

The copyright of this document belongs to Xixun Technology. Without the written permission of our company, no unit or individual may copy or extract the content of this article in any form.

Trademark



is a registered trademark of Xixun Technology.

Update Record

No.	Version	Updates	Revision Date
1	Ver.1.0	Initial Release	2024.01.01

The document is subject to change without prior notice.

Product Image





Functions&Features

Sysolution ST40 is a compact HDMI/LVDS input synchronous sending card, suitable for small full color screen docking with set-top boxes or third-party playback boxes, easy to install.

- 1. HDMI input port, can be directly inserted into HDMI outputs such as graphics cards/video processors/set-top boxes/players, can use DVI-HDMI adapter extension cable.
- 2. LVDS input port, can be directly inserted into the LVDS output port of L20/L30 board, and can be connected to the LVDS output port of FPC flexible ribbon cable.
- Supports multiple standard input resolutions and custom resolutions, with widest 3840 pixels and highest 2160 pixels.
- 4. Support Gigabit 4 Ethernet ports output.
- 5. The maximum number of loaded display screen points is 2.6 million, with LED display screens of any width and height.
- 6. Conventional display screens do not require complex settings, and can complete parameters and arrange display screens with just one click.
- 7. Connect the computer with a Micro USB serial cable, compatible with Jucheng screen control, and complete all complex setting functions.
- 8. Can be used to test display screens on construction sites without computer operation. Can be used for simple aging testing display screen modules on production lines.
- 9. All operations are completed with one click, Chinese screen printing, simple and easy to use.


10. Can be used for PWM ICs such as ICN2053, ICN2153, ICN2163, MBI5153, MBI5252, MBI5359, SUM2131, SM16259, and other PWM IC algorithms that must be synchronously driven at 60Hz, with no faults or tears in the image.

SHEWAHEN SYSOLUTION FECHNOLOGY CO.

Hardware Parameters

Туре	Parameters		
	1080P@50/59.95/60, 1080P@23.98/24/29.97/30Hz,		
Resolution	1080i@50/59.94/60/Hz, 720P@23.98/24/29.97/30Hz,		
	720P@50/59.94/60Hz,4K/30Hz		
System	1001117		
clock	120MHZ		
Flash	256KB		
SRAM	48KB		
Power	5.0V (maximum voltage does not exceed 5.5V) 2A DC power		
	input, onboard anti-reverse connection circuit		
Power			
current	Routine use current 0.3A - 0.6A, 25°C		
Power	72		
supply type	VH3.96 seat (XH2.54-4P seat)		

Interface Definition

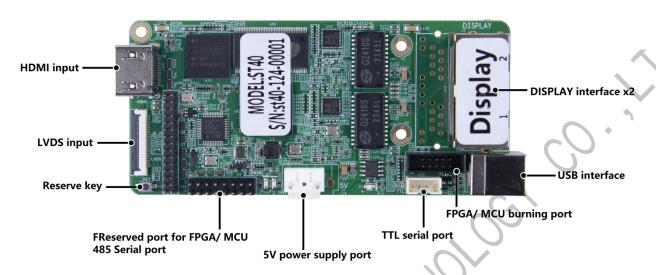



15X2MM double row pin LVDS

interface input



Power supply interface (choose one of XH2.54-4P socket and VH3.96 power socket for welding)

VH3.96 power socket

Pin spacing: 3.96mm


Pin definition:

1-GND

2-GND

3-5V

5V



VH3.96 power socket

Pin spacing: 3.96mm


Pin definition:

5-GND

6-GND

7-5V

8-5V




DISPLAY Interface


Gigabit network port four outputs (The regular style has only two network outlets)



AZHEN SYSOLUTION FECHNOLOS

Dimensional Drawing

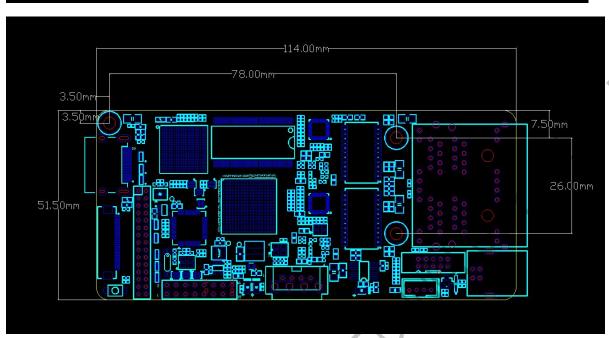

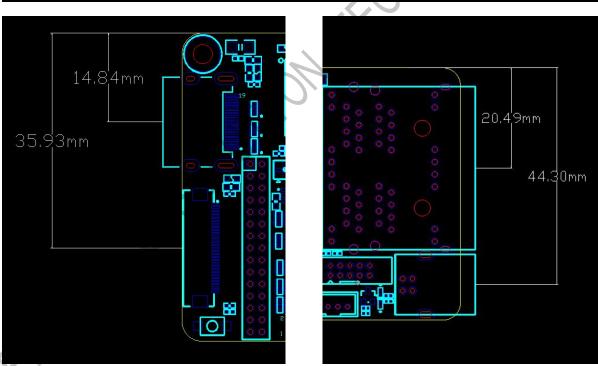

Unit: mm

Notes

- 1. The USB interface cannot power the card or to other devices.
- 2. Do not use improper voltage power supply.
- 3. Please use the equipment in a dry and clean environment.
- 4. It is strictly prohibited to disassemble and disassemble the product by yourself