



Linsn Technology



# RV906

## Receiver

# Specifications

V3.0

## Revision History

Document Version	Hardware Version	Revision Date	Note
V3.0	V5	2020/1	New edition


## Overview

RV906 is a standardize product for LED screen manufacturer, which is integrated with 6 standard hub75-type connectors and does not require an extra hub card. One card supports up to 256\*384 pixels, and up to 12 sets of RCG data.

## Functions and features


1. Single card can support 12 group of RGB data output mode
2. Maximum supports 256X384 pixels
3. Supports brightness calibration pixel by pixel and single-card color space conversion
4. Supports network cable BER test
5. Supports configuration file read back
6. Supports 138 decode, 595 serial decode and so on
7. Realizes high refresh and high gray level effect

## Appearance

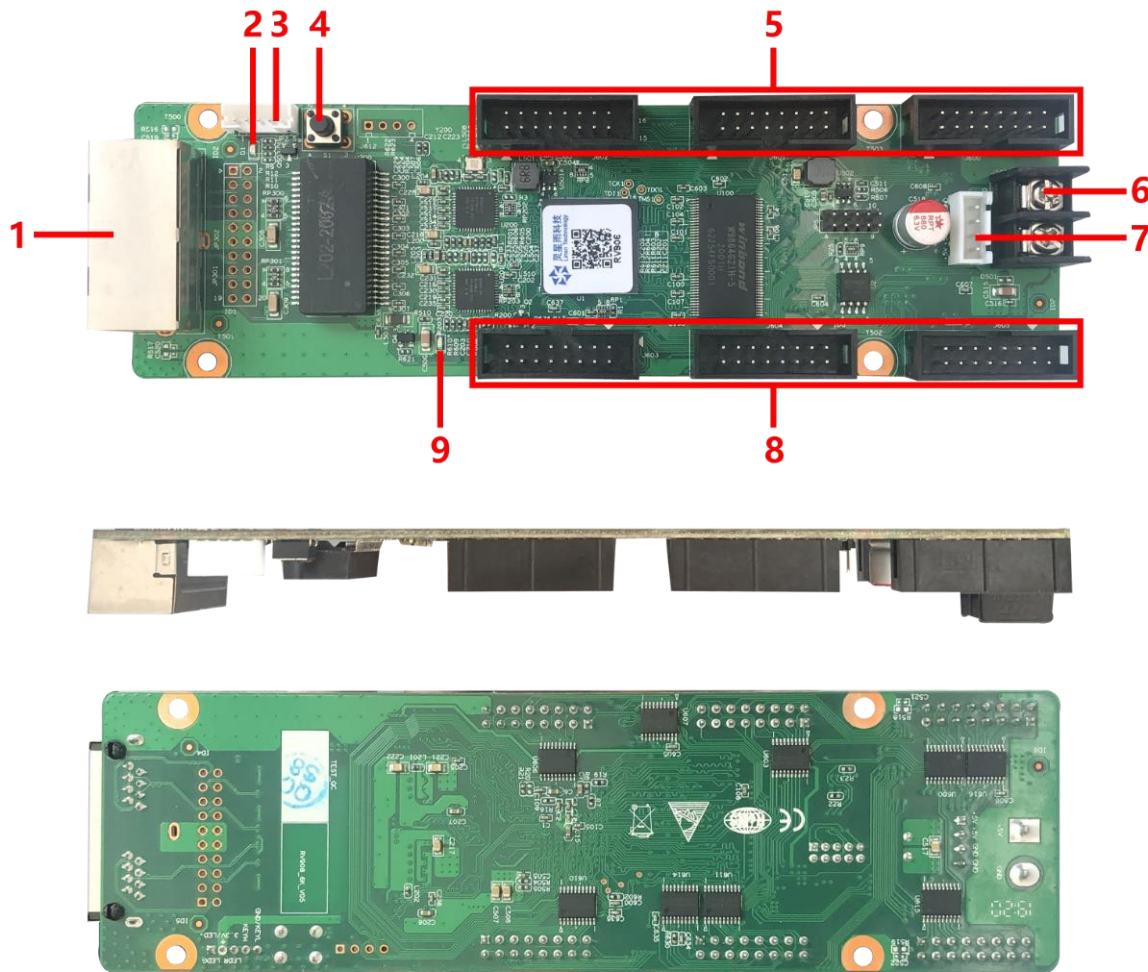


No.	1	2	3	4
Description	Gigabit port	Green indicator	Self-test extension port	Self-test button
No.	5/8	6	7	9
Description	HUB75 connector	Power connector	Power port	Red power indicator

## Pinouts

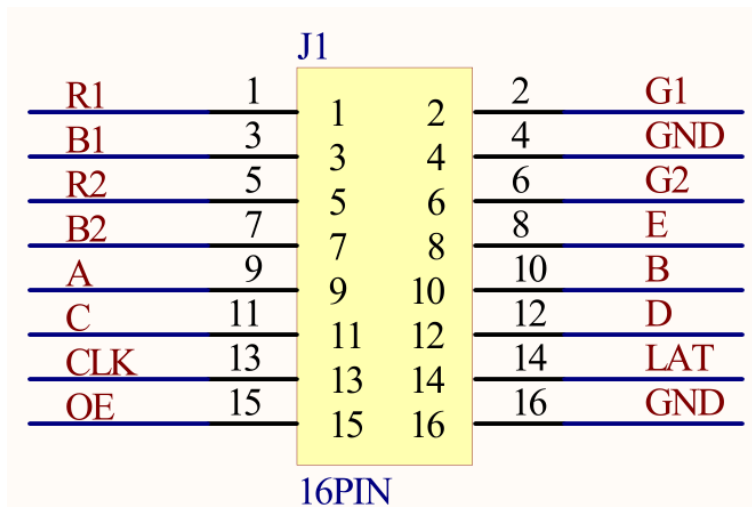

/	R1	1	2	G1	/
/	B1	3	4	GND	GND
/	R2	5	6	G2	/
/	B2	7	8	E	Row selection signal
Row selection signal	A	9	10	B	Row selection signal
Row selection signal	C	11	12	D	Row selection signal
Scan clock	CLK	13	14	LAT	Latch
Display enable	OE	15	16	GND	GND

## Dimensions

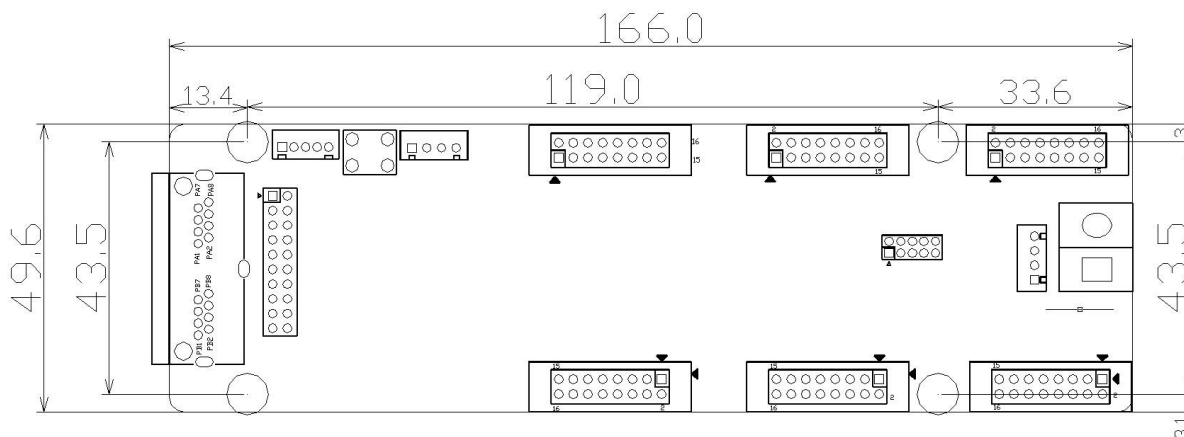

Official website: [www.linsn.com](http://www.linsn.com)

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,  
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

## Specifications

Capacity	256X384 Pixels	
Power	Input Voltage	DC4.5V ~ 5.5V
	Rated power consumption	3W
Working Environment	Temperature	-20°C ~ 70°C
	Humidity	0% ~ 95%
Physical Dimensions	Dimensions	166.0 X49.6 mm
	Weight	96g
Packing Info	Packing	Each card packed with small red foam bag, and 100pcs per carton
	Carton Dimension	622.0mm × 465.0mm × 176.0mm
	Carton Weight	12.4 kg

**END**