

## **Sending card**

### **TS902**

V1.1

Jan 2019

TS902 is a sending card with four network ports, and supports single, double and full color LED screen. It also supports 4K video source input and its maximum capability is 2.6 million pixels.

#### **1. Features:**

- 1) One Audio signal input;
- 2) One PCI-E 1X interface;
- 3) One DVI video signal input;
- 4) One HDMI video signal input;
- 5) Supports 4K video source input;
- 6) Supports RCG file read-back function;
- 7) Supports RCG file broadcasting function;
- 8) Supports CON file broadcasting function;
- 9) Supports 12bit/10bit/8bit video input;
- 10) Supports 16bit grey scale;


Official website: [www.linsn.com](http://www.linsn.com)

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,  
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

- 11) With four network output ports, supports common video source, like 2560x1024, 1920x1200, 2048x1152, etc;
- 12) Supported video format: RGB, YCrCb4:2:2, YCrCb4:4:4.

## 2. Appearance

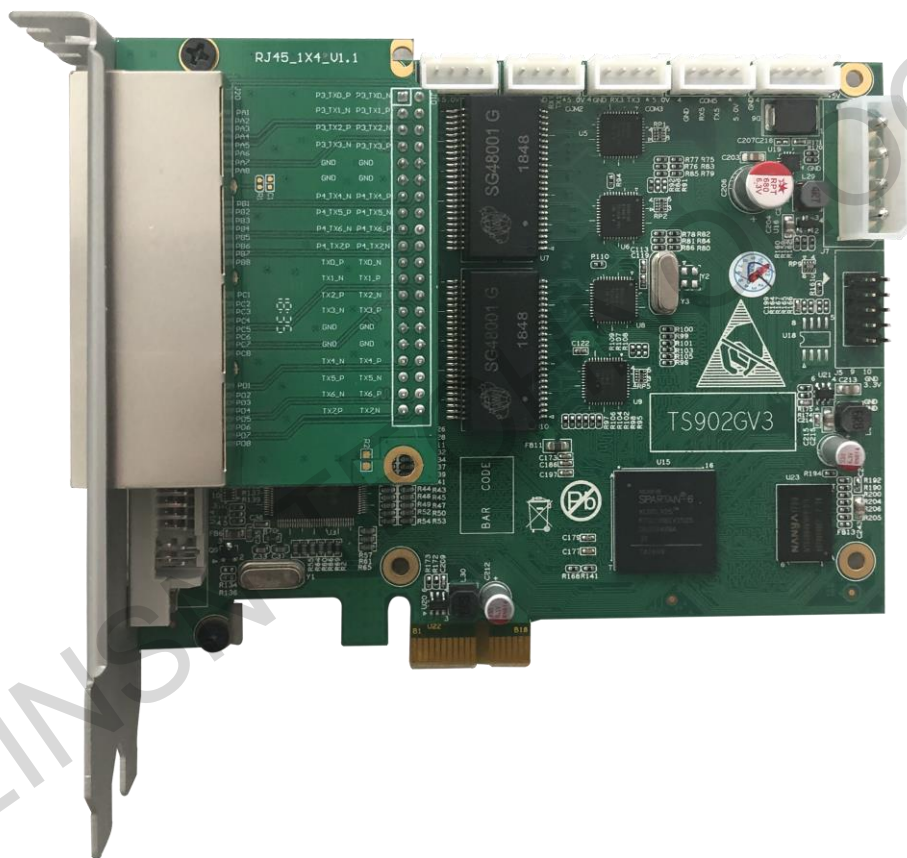



### 3. Working conditions

|                            |              |         |      |         |      |
|----------------------------|--------------|---------|------|---------|------|
| Rated voltage (V)          | 5            | maximum | 5.5  | minimum | 4.5  |
| Rated current (A)          | 0.50         | maximum | 0.57 | minimum | 0.46 |
| Rated power consumption(W) | 2.5          | maximum | 3.1  | minimum | 2.1  |
| Working temperature (°C)   | -20°C ~ 70°C |         |      |         |      |
| Working humidity (%)       | 0% ~ 95%     |         |      |         |      |

**END**