

Small size MCU card

KD05

Product specification

Statement

Dear user friend, thanks for choosing SHENZHEN SYSOLUTION TECHNOLOGY CO.,LTD (hereinafter referred to as Xixun Technology) as your LED advertising equipment control system. The main purpose of this document is to help you quickly understand and use the product. We strive to be precise and reliable when writing the document, and the content may be modified or changed at any time without notice.

Copyright

The copyright of this document belongs to Xixun Technology. Without the written permission of our company, no unit or individual may copy or extract the content of this article in any form.

Trademark



is a registered trademark of Xixun Technology.

Update Record

NO.	Version No.	Updates	Revision Date
1	V1.0	Initial issue	2022.08.01

The document is subject to change without prior notice.


SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD

Product Introduction

KD05 product is a general-purpose Wi-Fi + BT + BLE microcontroller universal card, support for 75 interface protocols, will not affect the secondary use of the module. With A,B,C,D,E five scanning signals, support key rest function; The clock frequency is adjustable from 80MHz to 240MHz.

It can be used for doorway full-color bar screen, cab animation, backpack screen, car sticker screen, stall screen, creative display screen, motorcycle screen, etc.


Product Image

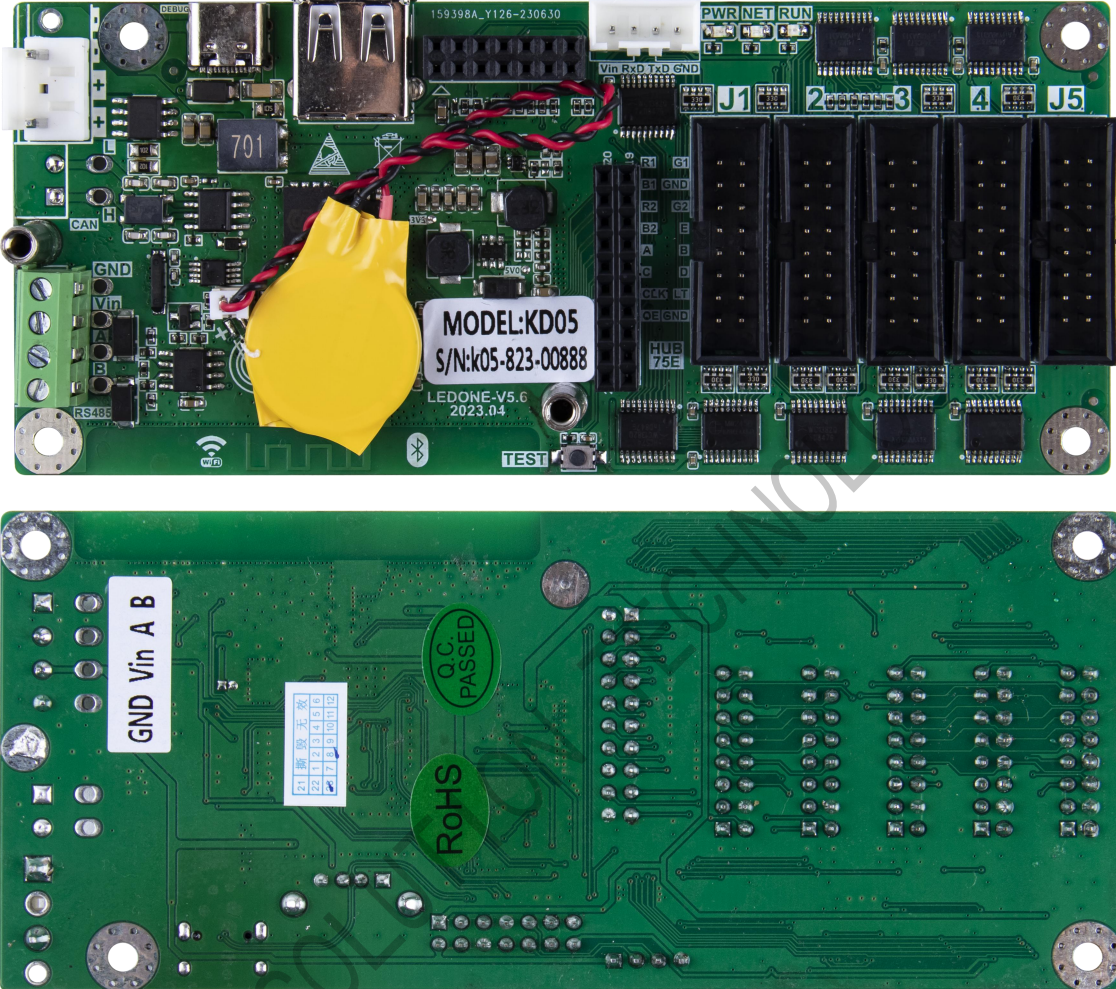

Product Parameters

Items	Parameters
Loading Pixels	5 HUB75 Interfaces, 320x320
Communication methods	Bluetooth/WiFi/RS485/TTL communication
System	<ol style="list-style-type: none"> 448KB of ROM for program startup and kernel function calls. Integrate SPIflash 8MB. 520KB on-chip SRAM for data and instruction storage. RTC fast memory, as an 8KB SRAM, can be used for data storage and accessed by the main CPU during RTC startup in Deep-sleep mode. RTC slow memory, as an 8KB SRAM, can be accessed by the coprocessor in Deep-sleep mode.
WiFi	<ol style="list-style-type: none"> Support IEEE802.11b/g/n protocol. Operating frequency range: 2.4GHz~2.5GHz.
Bluetooth	<ol style="list-style-type: none"> Compliant with Bluetooth v4.2BR/EDR and BLE standards. NZIF receiver with -97dBm sensitivity. Class-1, Class-2 and Class-3 transmitters. Audio CVSD and SBC.
Configuration software	LedOK Lite

Interface Labelling

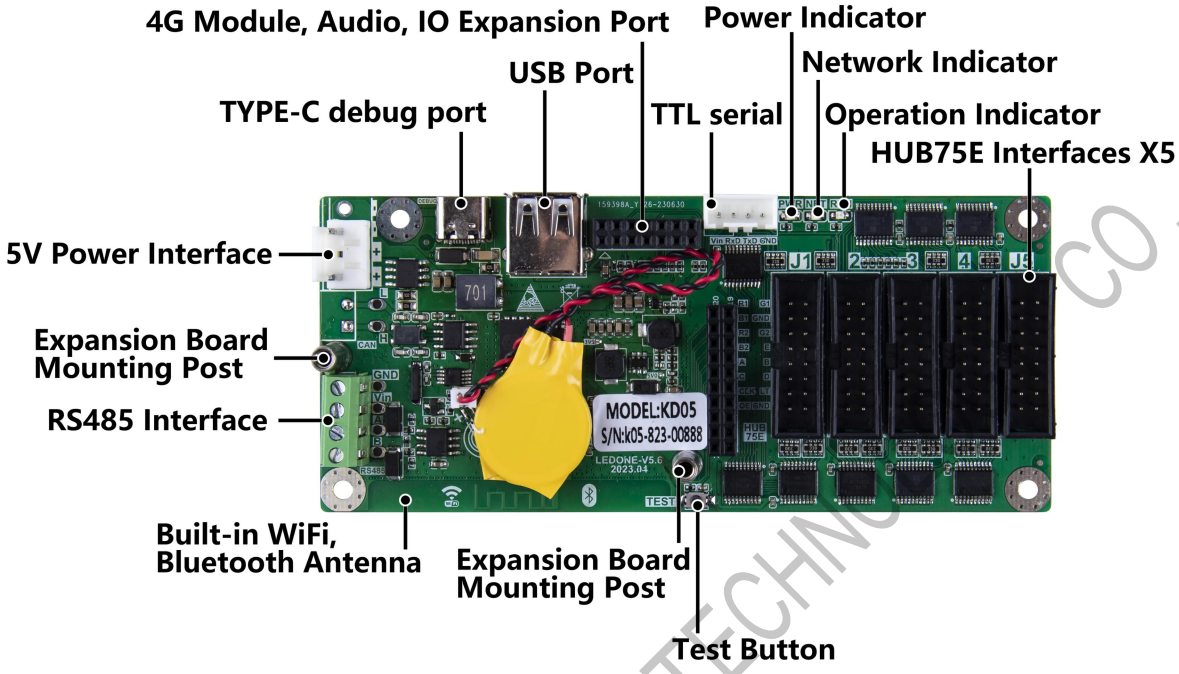


SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD

Working Conditions


Item	Parameters
Operating voltage	5V
Operating current (average)	80mA
Supply current (min)	500mA
Operating temperature	-40~85°C

Dimension

Control card 3D diagram

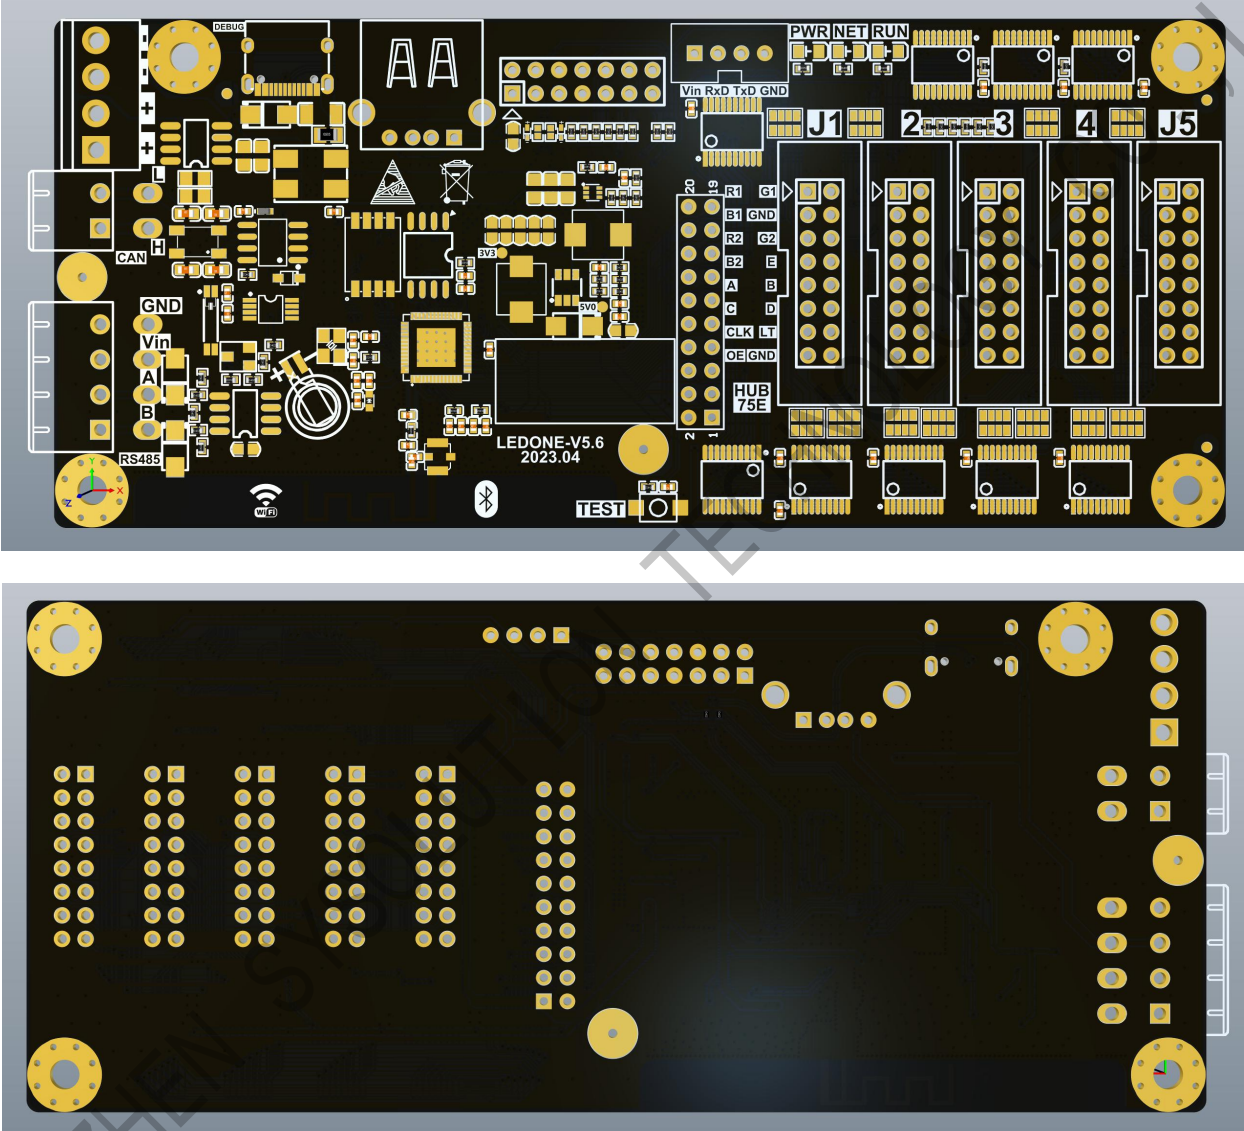

Control system dimension

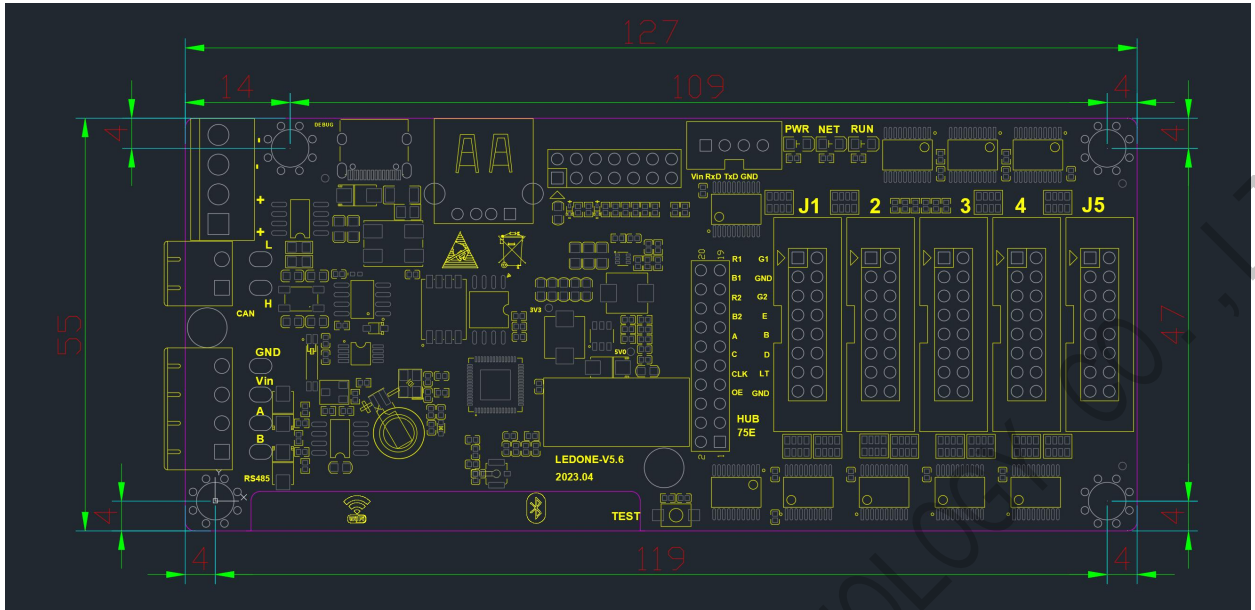

Unit: mm

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD.

Note

1. For a grayscale effect, please use high refresh rate chip.
2. The power supply is 5V.
3. The antenna WIFI area has been cleared. Metal devices can interfere the use, it is recommended that there are no metal devices in the vicinity.

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD