



 **SYSOLUTION**

**S40**

---

**2 In 1 Video Processor**

---

**Product Specifications**

Version: Ver.1.1

## **Statement**

Dear user friend, thanks for choosing SHENZHEN SYSOLUTION TECHNOLOGY CO.,LTD (hereinafter referred to as Sysolution) as your LED advertising equipment control system. The main purpose of this document is to help you quickly understand and use the product. We strive to be precise and reliable when writing the document, and the content may be modified or changed at any time without notice.

## **Copyright**

The copyright of this document belongs to Sysolution. Without the written permission of our company, no unit or individual may copy or extract the content of this article in any form.

## **Trademark**



is a registered trademark of Sysolution.

# Update Record

---

| No. | Version | Update         | Revise     |
|-----|---------|----------------|------------|
| 1   | Ver.1.0 | Initial Issue  | 2020.04.01 |
| 2   | Ver.1.1 | Content change | 2020.10.30 |

Note: The contents of the document are subject to change without notice.

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD

# Product Brief Induction

---

S40 is a pure hardware device developed for LED display, which is easy to operate and rich in functions. It supports high-definition multi-type interface input, integrates professional display control technology and powerful video processing capability, simplifies the construction of video processor in the field environment, and adopts high-performance image processing chip. With advanced interlacing image adaptive processing technology and super clear noise reduction engine to eliminate the regular frequency image motion trailing and serrate phenomenon, video image enhancement technology to make more clear and exquisite, rich details, full color, image quality stability.

## Product Feature

1. **Integrated Sending Card:** It has a 2-way gigabit network port output directly connected to the receiving card, simplify site environment construction.
2. **Free PC Debugging:** No computer software is required for screen debugging. Now just a knob and a button, a simple operation can be completed display debugging, all the operation steps can be completed.
3. **Seamless Switch:** It is a seamless switch splicer, which can realize seamless switch of all input channels;



HDMI



Switching  
Transition



DVI

### Application Scenarios

Suitable for small and medium-sized Led display screens in shopping malls, hotels, exhibitions and TV broadcasting center

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD

# Functions

---

1. Support seamless switching or fading in and out between multiple signal input channels.
2. Supports fast screen connection, and the screen body configuration can be completed with simple operation.
3. Front panel intuitive LCD display interface, clear key lights prompt, simplify the system control operation.
4. Support the creation of 8 user stories as templates that can be directly called.
5. Support 4 network port outputs, with a maxi load of 2.3 megapixels, a max width of 3840 and a maxi width of 1920.
6. Support window position, size adjustment and window interception functions.
7. Support external independent audio input and output.
8. Support for custom output resolution.
9. Support for custom input EDID.
10. Audio and video synchronization switch.
11. Partial or full screen toggle .
12. Support engineer lock .
13. A key blank screen.


# Product parameter

---

|                       |  |                         |
|-----------------------|--|-------------------------|
| Load capacity         | single netports  | 650,000 thousand pixels |
|                       | four netpovts  | 260,000 thousand pixels |
| Supprot<br>resolution | 1024×768@60Hz, 1280×720@50Hz/60Hz, 1440×900@60Hz,<br>1280×1024@60Hz, 1600×1200@60Hz, 1680×1050@60Hz,<br>1024×1920@60Hz, 1920×1080p@50Hz/60Hz,<br>1920×1200p@60Hz, 1024×1280@60Hz, 1536×1536@60Hz,<br>2048X1024@60Hz, 2304X1080@60Hz, 2560X1080@60Hz,<br>3840X640@60Hz, 1080X1920@Hz. |                         |

# Interface definition

## Front Panel

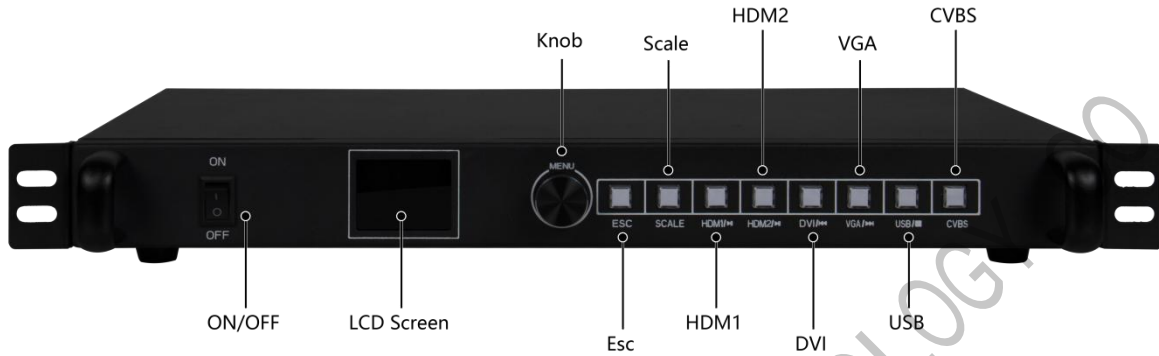


| No. | Keyswitch  | Introduction  |
|-----|------------|---|
| 1   | ON/OFF     | Power switch  |
| 2   | LCD screen | Displays the current state of the device, as well as the settings menu.   |
| 3   | Knob       | <ol style="list-style-type: none"> <li>Under the main interface, press the knob to enter the menu operation interface.</li> <li>Under the menu operation interface, rotate the knob to select the menu, press down the knob to select the current menu or enter the submenu.</li> <li>After selecting the menu with parameters, you can adjust the parameters by turning the knob, please note that you need to press down the knob again to confirm the adjustment.</li> </ol> |



|   |       |  |
|---|-------|--|
| 4 | Esc   | Return/ cancel the current menu or action.   |
| 5 | SCALE | Full screen zoon shortcht key  |
| 6 | Input | <p>Enter the source key introduction : <b>HDMI1</b> input source button, which is reused as "▶  " when the usb flash drive is playing,pause or play the file.</p> <p><b>HDMI2</b>: HDMI2 input source key , when u disk is playing, reuse is "◀◀" , select the last file to play the current file</p> <p><b>DVI</b>: DVI input source key, when u disk is playing, reuse is "▶▶" , select the next file to play the current fileb.</p> <p><b>VGA</b>: VGA input source key , when u disk is playing,reuse is "■" , stop playing. ,</p> <p><b>USB</b>: External media play,u disk play input soruce.</p> <p><b>CVBS</b>: CVBS input source key .</p> <p>The long light indicates that the source is connected and in use. The indicator light flashes to indicate that the interface is in use but there is no signal source.</p> <p>The indicator light is off to indicate that the signal source is not in use.</p> |

## Later Version

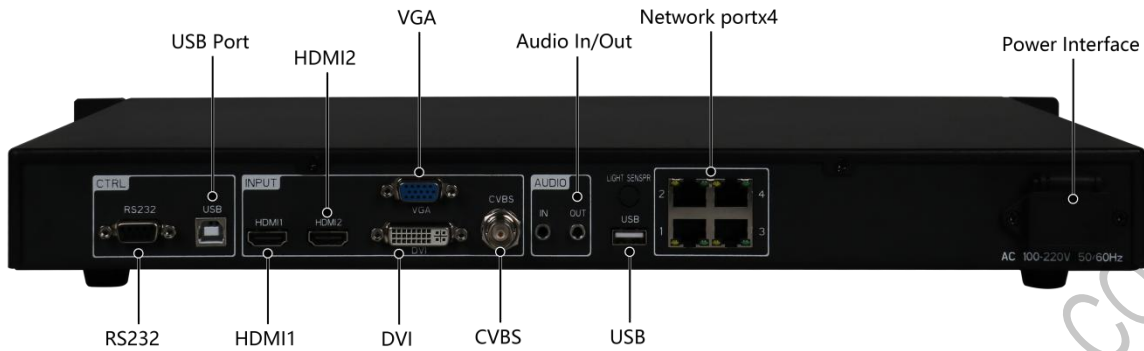

| Input Interface  |     |   |
|------------------|-----|---|
| Interface        | No. | Notes   |
| HDMI             | 2   | Standard of HDMI1.3, Maxi support 1920×1080@60Hz Resolution video source input, downward compatibility.Support HDCP1.4. |
| VGA              | 1   | Maxi support 1920x1080@60Hz , Resolution video source input, downward compatibility.                                    |
| DVI              | 1   | VESA standard maxi support 1920×1080@60Hz input video source input, downward compatible.                                |
| CVBS             | 1   | PAL/NTSC standard video input.  |
| AUDIOIN          | 1   | 3.5mm Audio interface.  |
| Output interface |     |   |
| Interface        | No. | Notes   |
| Internet         | 4   | four network port output interface, connected to the receiving card.  |




|                   |     |  |
|-------------------|-----|--|
| AUDIOOUT          | 1   | 3.5mm audio interface<br>Supports audio output channels: 3.5mm audio interface 、 HDMI、 USB |
| Control interface |     |  |
| Interface         | No. | Notes  |
| RS232             | 1   | Debug serial port  |
| USB-B             | 1   | USB debug port   |

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD

# Connection Schematic Diagram



↑↑  
Ethernet cable




# Work Parameter

---

|                       |   |                               |
|-----------------------|---|-------------------------------|
| Electric parameter    | Input voltage   | AC-100-240V-50/60HZ           |
|                       | Rated power   | 11W                           |
| Work environment      | Work temperature  | -20°C-70°C                    |
|                       | Work humidity   | 10%RH-90%RH No solidification |
| Outline dimension     | Dimension of machine case: 430x251x44mm(lengthxwidthxheight)  |                               |
| Net weight            | 3.85Kg  |                               |
| Packaging Information | One piece of equipment per box. Accessories include: 1 USB cable, 1 DVI cable, 1 VGA cable, and 1 HDMI cable. |                               |

# Dimension figure

---

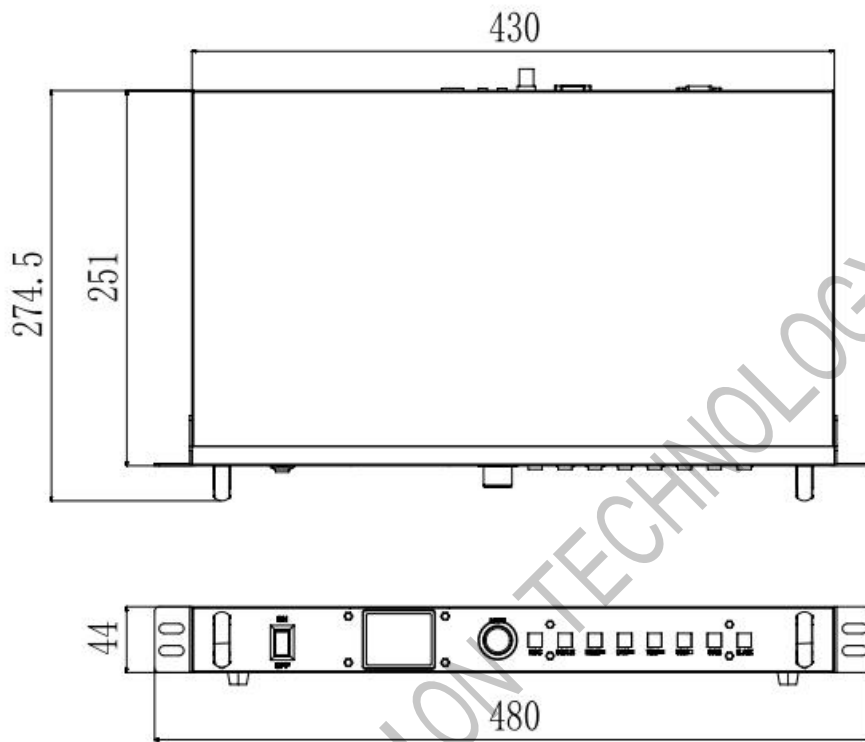

Unit: mm

# Notes

---

1. Commission, installation process must be completed by professionals.
2. Non-professional personnel are not allowed to dismantle the machine for maintenance without authorization.
3. Pay attention to waterproof.

SHENZHEN SYSOLUTION TECHNOLOGY CO., LTD